

## GLOBAL STABILITY OF AN ISOLATED CYLINDRICAL RUGOSITY

Jean-Christophe Loiseau<sup>\*a)</sup>, Jean-Christophe Robinet<sup>\*</sup> & Emmanuel Leriche<sup>\*\*</sup>

<sup>\*</sup>*Laboratoire DynFluid, Arts et Métiers ParisTech, Paris, France*

<sup>\*\*</sup>*Laboratoire de Mécanique de Lille, Université Lille-1, Villeneuve d'Ascq, France*

### Summary

Over the past years, cylindrical roughnesses immersed within a boundary layer flow have been used as a possible way to delay transition to turbulence. However, for some particular setups, transition can actually occur right downstream the rugosity. The purpose of the present work is to investigate the transition induced by symmetric and anti-symmetric mechanisms by means of direct numerical simulations, global linear stability analysis and eventually linear optimal perturbation.

### INTRODUCTION

Delaying transition in boundary layer flow has been a long time challenge. It has been known for a while that transition to turbulence in such a flow can be caused by Tollmien-Schlichting (TS) waves. Fransson *et al* [4] have shown theoretically that these TS waves can be stabilized by streaks as long as the latter have an amplitude less than 26% of the external velocity. In the experimental part of their work, they have created those streaks using a periodic array of cylindrical rugosities. Unfortunately, for some sets of parameters, the flow actually undergoes transition right downstream the rugosities. The mechanism responsible for this transition is not yet known. However, a few hypothesis can be made when drawing a parallel with the jet in cross-flow linear stability analysis performed by Bagheri *et al* [3] and Ilak *et al* [5]: transition can either be caused by symmetric perturbations closely linked to Kelvin-Helmholtz instability and hairpin vortices, or by anti-symmetric perturbations similar to the one existing in a 2D cylinder flow. In the present work, the base flow will first be presented. Then the linear stability analysis will mainly focus on symmetric perturbations, before discussing the results and giving the prospects for the work to be done in the nearby future.

### BASE FLOW

The base state  $\mathbf{Q} = (\mathbf{U}, P)^T$  is a solution to the time-independant incompressible Navier-Stokes equations:

$$\begin{cases} (\mathbf{U} \cdot \nabla) \mathbf{U} = -\nabla P + Re^{-1} \nabla^2 \mathbf{U} \\ \nabla \cdot \mathbf{U} = 0 \end{cases}$$

where the Reynolds number  $Re$  is defined as  $Re = Uh/\nu$ ,  $h$  being the height of the cylindrical rugosity and  $\nu$  the viscosity. Two furthermore parameters come into play to fully characterize the base flow: the aspect ratio  $\eta = d/h$ , where  $d$  is the diameter of the rugosity and the boundary layer thickness  $\delta_{99}$ . All the calculations are performed using the direct numerical simulation spectral elements code Nek 5000 [6]. A symmetry plane is used to kill any anti-symmetric perturbation and to reduce the computational cost. Along with it, a low pass-by filter, as prescribed by Akervik *et al* [1] is used whenever the base flow is unstable with respect to symmetrical perturbations.

The base flow computed for the following set of parameters:  $(Re, h, \eta, \delta_{99}) = (1250, 1, 1, 1.79)$  is presented on figure . Figure (a) shows the major features of this base flow: the upstream and downstream recirculation bubbles depicted as the zero streamwise velocity surface (blue) and the horseshoe vortex represented by the  $\lambda_2$  isosurface (red). Figure (b) depicts a colorplot of the streamwise velocity in the symmetry plane where both recirculation bubbles have the maximum spatial extent. One can see that the main recirculation bubble extends about  $4h$  downstream the rugosity, whereas the length of the upstream recirculation bubble is only roughly  $2h$ .

### LINEAR STABILITY ANALYSIS AND DIRECT NUMERICAL SIMULATION

Perturbations  $\mathbf{q} = (\mathbf{u}, p)^T$  to the base flow computed previously are governed by the following linearized Navier-Stokes equations:

$$\begin{cases} \partial_t \mathbf{u} + (\mathbf{u} \cdot \nabla) \mathbf{U} + (\mathbf{U} \cdot \nabla) \mathbf{u} = -\nabla p + Re^{-1} \nabla^2 \mathbf{u} \\ \nabla \cdot \mathbf{u} = 0 \end{cases}$$

This set of equations can be recasted into a classical dynamical system form  $\mathcal{B} \partial_t \mathbf{q} = \mathcal{L} \mathbf{q}$ , where  $\mathcal{L}$  is the jacobian matrix of the Navier-Stokes equations. This matrix being far too large to be explicitly calculated, only the linearized Navier-Stokes equations have been advanced in time so far.

### Symmetric perturbations

As a first step toward comprehension, only the stability to symmetric perturbations is investigated. According to our preliminary results, for the considered set of parameters, the base flow is unstable toward such perturbations. Figure shows

<sup>a)</sup>Corresponding author. E-mail: loiseau.jc@gmail.com


the spatial structure of the perturbation emerging from the direct numerical simulation of the linearized Navier-Stokes equations once the transients have been evacuated from the computational domain. Only the streamwise component of the resulting perturbation is shown. It is important to note, looking at the time evolution of the perturbation's energy (not shown here), that it seems like a whole family of symmetric modes is unstable.

## CONCLUSION AND PROSPECTS

The stability to symmetric perturbations of the flow over a cylindrical rugosity has been investigated. The symmetric eigenmodes resulting from this linear stability analysis are characterized by their chevron shape. Caution must be taken until the eigenspectrum of the linearized Navier-Stokes operator has been calculated, but it seems that a whole family of global modes is unstable for the considered set of parameters. Preliminary results regarding the stability to anti-symmetric perturbations tend however to give another possible scenario where an anti-symmetric global mode, similar to the one observed in a 2D cylinder flow, is responsible for transition. This second scenario would be somewhat more relevant with the experimental observations by Von Doenhoff and Braslow [7] where a periodic vortex shedding right downstream the rugosity is observed. In the nearby future, influence of the parameters on the competition between symmetric and anti-symmetric global modes will be investigated along with the transient growth very likely to take place in such an open shear 3D flow.

## References

- [1] Akervik E., Brandt L., Henningson D.S., Høpfner J., Marxen O. and Schlatter P.: Steady solution of the Navier-Stokes equations by selective frequency damping. *Physics of Fluids* **18**, 2006.
- [2] Bagheri S., Akervik E., Brandt L. and Henningson D.S.: Matrix-free methods for the stability and control of boundary layers. *AIAA Journal* **47** n° 5, 2009
- [3] Bagheri S., Schlatter P., Schmidt P.J. and Henningson D.S.: Global stability of a jet in cross flow. *J. Fluid Mech.* **624**, 2009
- [4] Fransson J.H.M., Brandt L., Talamelli A. and Cossu C.: Experimental and theoretical investigation of the nonmodal growth of steady streaks in a flat plate boundary layer. *Physics of Fluids* **16**, 2004
- [5] Ilak M., Schlatter P., Bagheri S. and Henningson D.S.: Bifurcation and stability analysis of a jet in cross flow. Part 1: onset of global instability at low velocity ratio. *J. Fluid Mech.* (Accepted), 2011
- [6] Fischer P.F., Lottes J.W. and Kerkemeier S.G.: Spectral h/p elements code Nek 5000. Web site <http://nek5000.mcs.anl.gov/>, 2011
- [7] von Doenhoff A.E. and Braslow A.L.: The effect of distributed surface roughness on laminar flow and flow control, volume 2. Pergamon Press, Lachmann edition, 1961

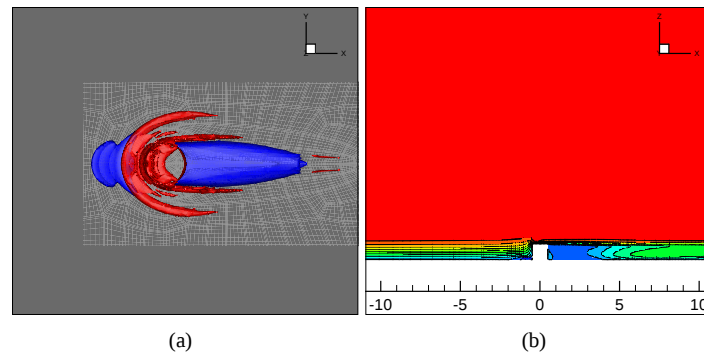

**Figure 1.** (a) Recirculation bubbles (blue) and horseshoe vortex (red). (b) Streamwise component of the velocity in the symmetry plane.

**Figure 2.** Streamwise component of the perturbation emerging from the time advancement of the linearized Navier-Stokes equations when symmetry is imposed.

